

- 1 – Tap Button
- 2 – Infusion Dial
- 3 – Nozzle
- 4 – Exterior
- 5 – Inlet Connector
- 6 – Main ON/OFF Switch
- 7 – Legs

- 8 – Forward Plate
- 9 – Rear Plate
- 10 – Side Panel(s)
- 11 – Power Cord
- 12 – Vents/Exhaust
- 13 – Control Panel
- 14 – Beverage Tube

- 15 – Elbow Connectors
  - 16 – Pre-Filter
  - 17 – BROOD Beverage Container
  - 18 – Inlet for Container
- SPECIFICATIONS**
- 19 – Thermostat
  - 20 – Calibration Knob
  - 21 – Inlet Air...?

SPECS	SINGLE	SINGLE (CONCENTRATE)
FUNCTION	COLD NITRO & COLD STILL	COLD NITRO & COLD STILL
TAPS	1	1
POWER SUPPLY	100-120V / 60HZ 200-240V / 50-60HZ	100-120V / 60HZ 200-240V / 50-60HZ
PHASE	SINGLE	SINGLE
AMPS	2.8A	2.8A
DIMENSIONS (W/H/D)	9.25/14.74/18.25IN	9.25/14.74/18.25IN
WEIGHT	75LBS	78LBS
DISPENSING CAPACITY	102 L/HOUR	102 L/HOUR
COFFEE TEMPERATURE AT TAP	36°F (+/- 3°F)	36°F (+/- 3°F)
INTERNAL TUBING CAPACITY	20 OZ	20 OZ
OPTIONAL ACCESSORIES	BIB BAGS BIB BOXES 1.5 GAL RESERVOIR 3.5 GAL RESERVOIR	BIB BAGS BIB BOXES 1.5 GAL RESERVOIR 3.5 GAL RESERVOIR
WARRANTY	1 YEAR	1 YEAR
PRESSURE AT TAP	34 PSI	34 PSI
INPUT BEVERAGE	READY-TO-DRINK (RTD)	CONCENTRATE
WATER ACCESS	NO	YES
WATER ACCESS INLET	N/A	¼IN BARB
DRAINAGE	NOT REQUIRED	NOT REQUIRED
RATIO RANGE	N/A	1:1 TO 13:1
DISPENSE OPTIONS	PUSH BUTTON TAP HANDLE	PUSH BUTTON TAP HANDLE

## FEATURES

Dispenses both nitro and still cold brew from the same tap  
Extracts nitrogen from the air; no nitrogen tank necessary

Pulls from any container, kegs are only one option

Plug & play in 2 minutes

Consistency with every pour

Chills on demand to 36°F

Works with any drink

No need to deal with gas tanks or companies

Compact design; can be placed over or under the counter  
Customizable color, design and tap handle


Patent Pending

In-line dosing pump that works with all ratios of cold brew concentrates

**120 VOLT**  
**W/CORD & PLUG**

1909 ALBION RD  
TORONTO ON, CANADA  
M9W 5S8

(647) 915-7771  
hello@drinkbrood.com  
drinkbrood.com

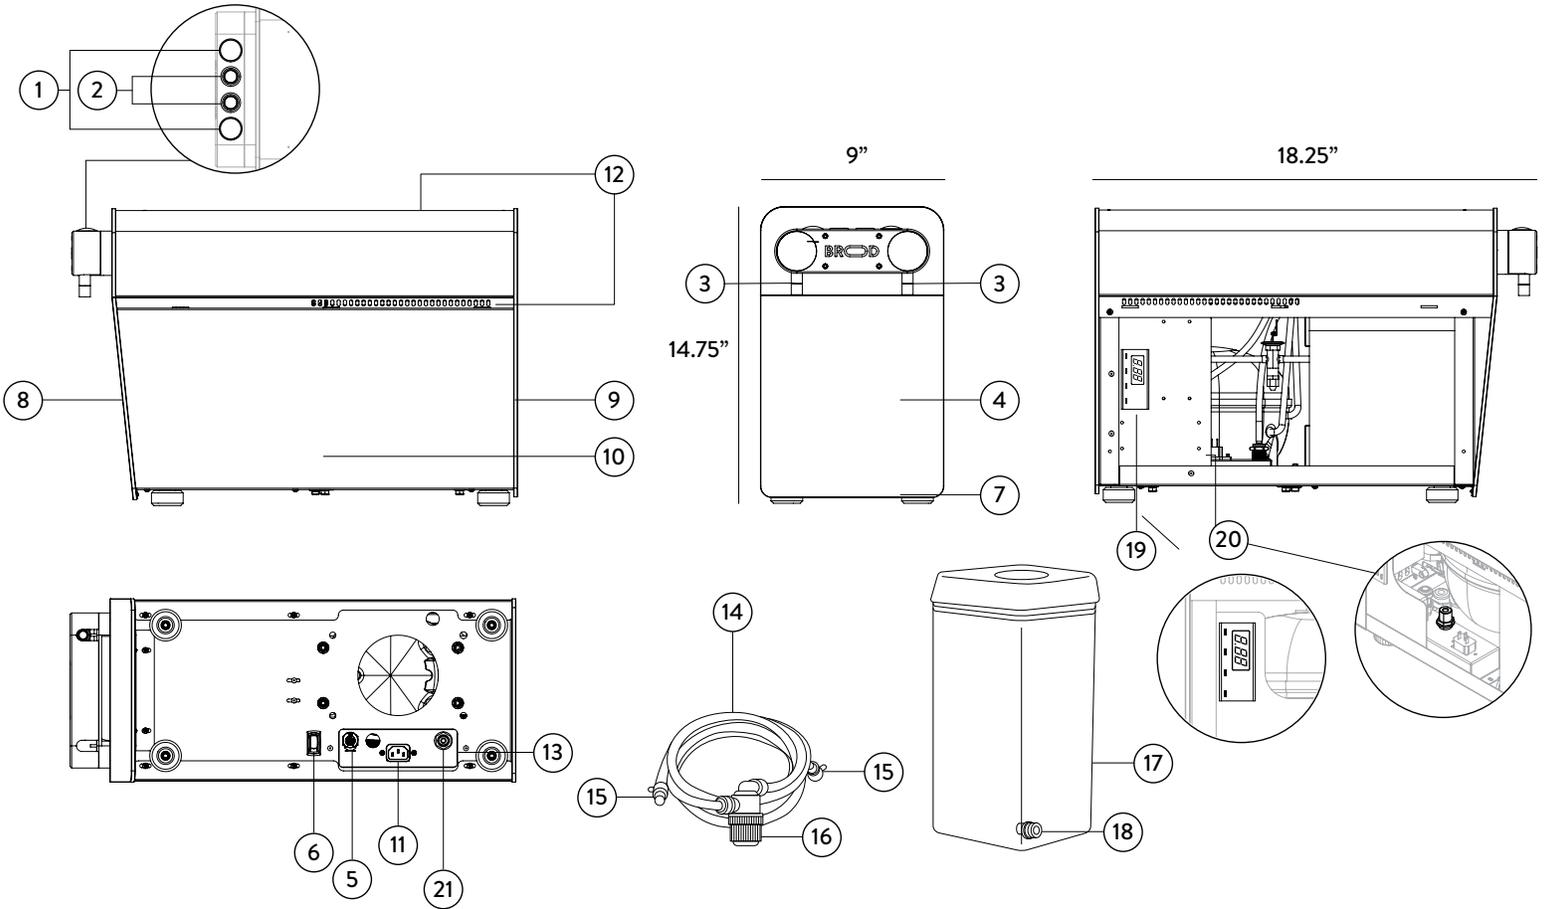

- 1 – Tap Buttons
- 2 – Infusion Dials
- 3 – Nozzles
- 4 – Exterior
- 5 – Inlet Connector
- 6 – Main ON/OFF Switch
- 7 – Legs

- 8 – Forward Plate
- 9 – Rear Plate
- 10 – Side Panel(s)
- 11 – Power Cord
- 12 – Vents/Exhaust
- 13 – Control Panel
- 14 – Beverage Tube

- 15 – Elbow Connectors
  - 16 – Pre-Filter
  - 17 – BROOD Beverage Container
  - 18 – Inlet for Container
- SPECIFICATIONS**
- 19 –Thermostat
  - 20 – Calibration Knob
  - 21 – Inlet Air...?

SPECS	DUAL
FUNCTION	COLD NITRO & COLD STILL
TAPS	2
POWER SUPPLY	100-120V / 60HZ 200-240V / 50-60HZ
PHASE	SINGLE
AMPS	3.0A
DIMENSIONS (W/H/D)	9.25/14.74/18.25IN
WEIGHT	78LBS
DISPENSING CAPACITY	102 L/HOUR PER TAP
COFFEE TEMPERATURE AT TAP	36°F (+/- 3°F)
INTERNAL TUBING CAPACITY	20 OZ PER TAP
OPTIONAL ACCESSORIES	BIB BAGS BIB BOXES 1.5 GAL RESERVOIR 3.5 GAL RESERVOIR
WARRANTY	1 YEAR
PRESSURE AT TAP	34 PSI
INPUT BEVERAGE	READY-TO-DRINK (RTD)
WATER ACCESS	NO
WATER ACCESS INLET	N/A
DRAINAGE	NOT REQUIRED
RATIO RANGE	N/A
DISPENSE OPTIONS	PUSH BUTTON TAP HANDLE

## FEATURES

Dispenses both nitro and still cold brew from the same tap  
Extracts nitrogen from the air; no nitrogen tank necessary

Pulls from any container, kegs are only one option

Plug & play in 2 minutes

Consistency with every pour

Chills on demand to 36°F

Works with any drink

No need to deal with gas tanks or companies

Compact design; can be placed over or under the counter  
Customizable color, design and tap handle

Patent Pending

In-line dosing pump that works with all ratios of cold brew concentrates

**120 VOLT W/CORD & PLUG**

1909 ALBION RD  
TORONTO ON, CANADA  
M9W 5S8

(647) 915-7771  
hello@drinkbrood.com  
drinkbrood.com